


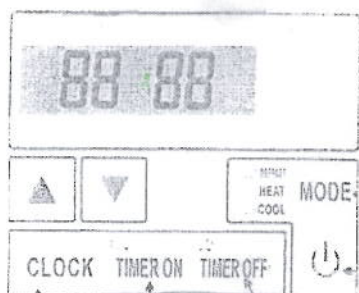

# Reversible pool heaters

## QUICK START

### 1. How to program your CLOCK:

Once the breaker is switched to **ON** the control board will show 4 digits.  
It's time to set the CLOCK







- A) Push once on **CLOCK** , the 2 numbers on the left will flash.
- B) Push on  to make the numbers go up, or  to make them go down, till you have the time, then press on **CLOCK**. Repeat step (B) to adjust the minutes then press **CLOCK**.

The time is now programmed

### 2. How to raise or lower desired water temperature:






- A) Push on  once, **0 27** will appear , push a second time  **1 27** will appear, the 2 numbers will flash. The temperature is set at 27 °, to modify temperature push on **MODE** and **CLOCK** at the same time . The number 27 will flash alone, then push on  to raise water temperature or  to lower water temperature.

It's done ! Your water temperature is set

**IMPORTANT:** YOU HAVE ONLY 5 SECONDS TO MODIFY THE TEMPERATURE, IF THE TIME SHOWS UP, YOU WILL HAVE TO RESTART #2.

### **3. How to start your pool heater:**

- A) The symbol  is used for **ON** or **OFF**.
- B) Push , the board will show the temperature of the pool. The pool heater is **ON** and will stop itself once the programmed temperature is reached.
- C) While the temperature of the water appears on the control board push  the time will show. Your pool heater is now **OFF**.

**IMPORTANT:** IF THE CONTROL BOARD SHOWS WATER TEMPERATURE YOUR POOL HEATER IS **ON**. IT WILL START AND TURN OFF AUTOMATICALLY AS NEEDED TO ACHIEVE DESIRED WATER TEMPERATURE.

IF THE CONTROL BOARD SHOWS THE TIME. YOUR POOL HEATER IS **OFF**. YOUR POOL HEATER WILL NOT FUNCTION.

**NOTE:** IF YOU WISH TO MODIFY WATER TEMPERATURE GO TO STEP #2. THE POOL HEATER MUST BE OFF, YOU WILL SEE TIME (CLOCK).